


TECHNICAL DESCRIPTION

LINE	BEARING	DISTANCE
LOT 1-A		
1-2	N.25-39E.	209.65 M.
2-3	S.55-33E.	154.46 M.
3-4	S.26-17W.	96.32 M.
4-5	S.26-17W.	89.62 M.
5-6	N.64-23W.	128.26 M.
6-1	N.64-23W.	22.33 M.
LOT 2		
1-2	N.64-23W.	220.45 M.
2-3	N.25-38E.	243.92 M.
3-4	S.55-33E.	223.15 M.
4-1	S.25-39V.	209.65 M.
LOT 3		
1-2	N.25-37E.	220.61 M.
2-3	S.68-41E.	62.15 M.
3-4	N.52-33E.	27.13 M.
4-5	S.69-59E.	11.32 M.
5-6	S.55-33E.	42.81 M.
6-7	S.25-38W.	243.92 M.
7-8	N.64-23W.	12.22 M.
8-1	N.64-24W.	115.54 M.
LOT 4		
1-2	N.64-24W.	140.98 M.
2-3	N.17-35E.	7.01 M.
3-4	N.27-10E.	203.52 M.
4-5	S.68-41E.	136.84 M.
5-1	S.25-37W.	220.61 M.
FROM: BLBM. NO. 1, BO. LUSUCAN MUN. OF TIAONG		
LOT 1-A	S.42-23E.	3507.78 M.
LOT 2	S.42-23E.	3507.78 M.
LOT 3	S.39-18E.	3176.89 M.
LOT 4	S.39-18E.	3176.89 M.

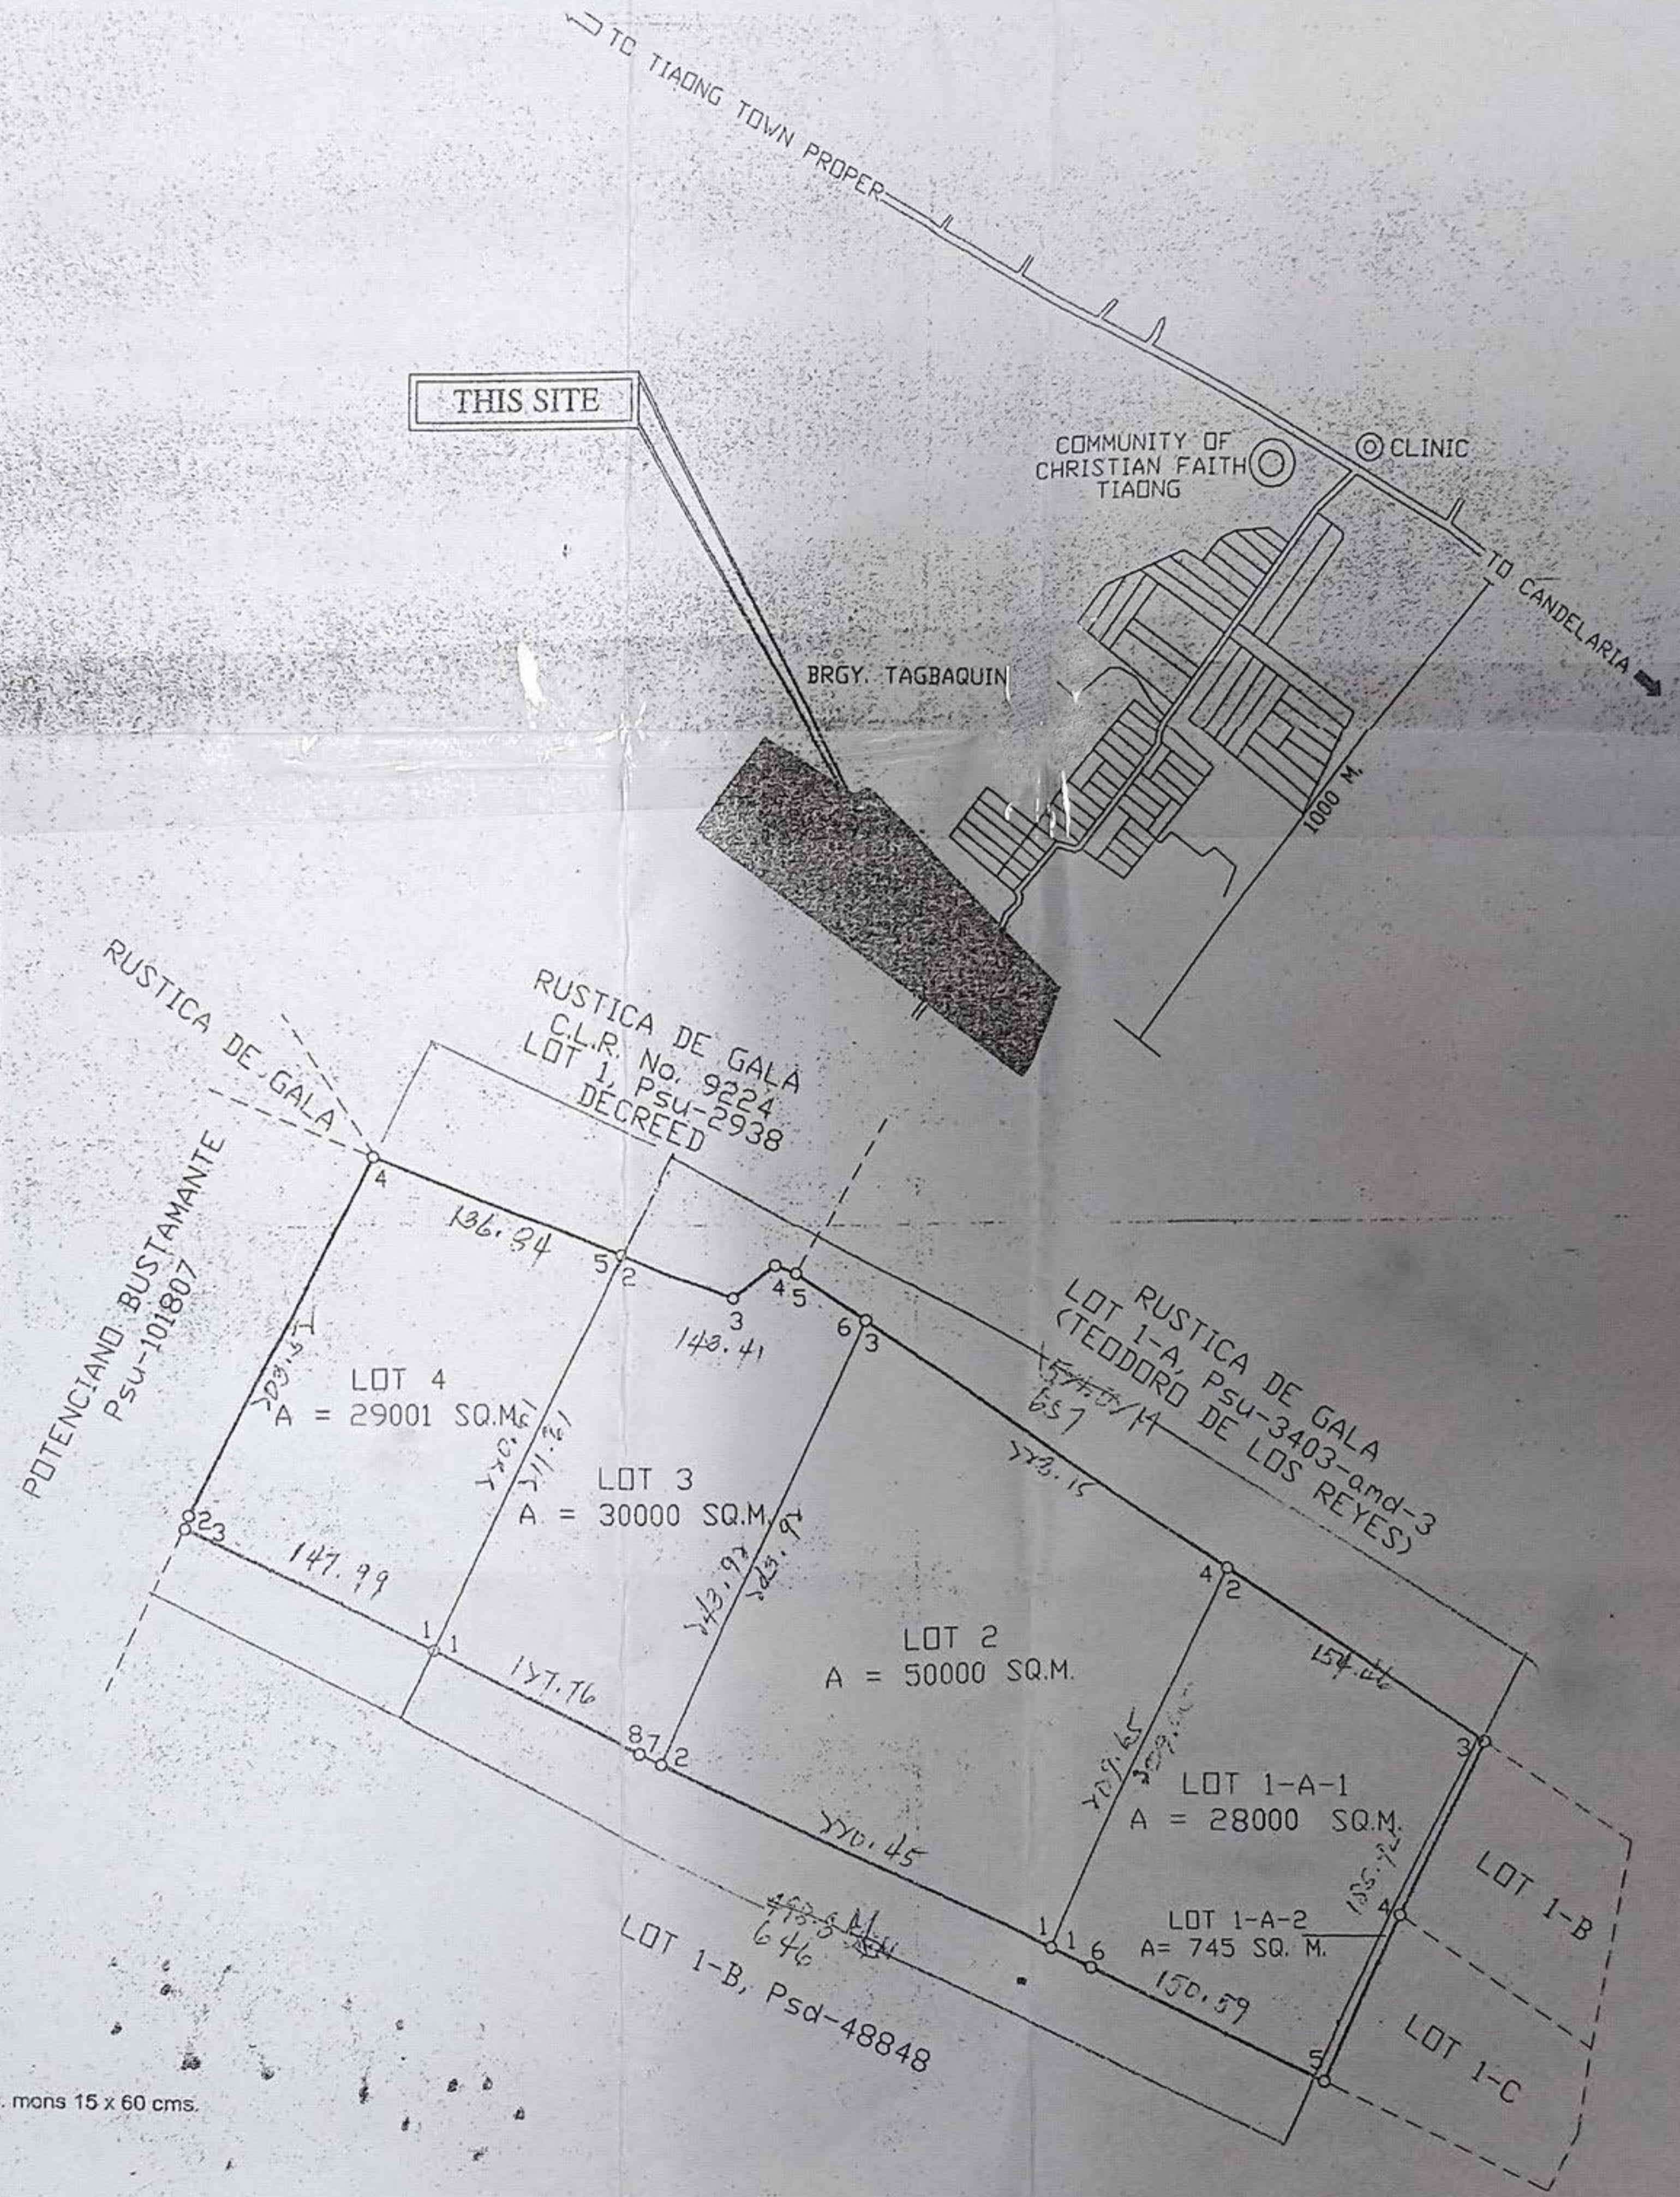

NOTE:
All corners are P.S. cyl. conc. mons 15 x 60 cms.